


# ECOPROTECTOR

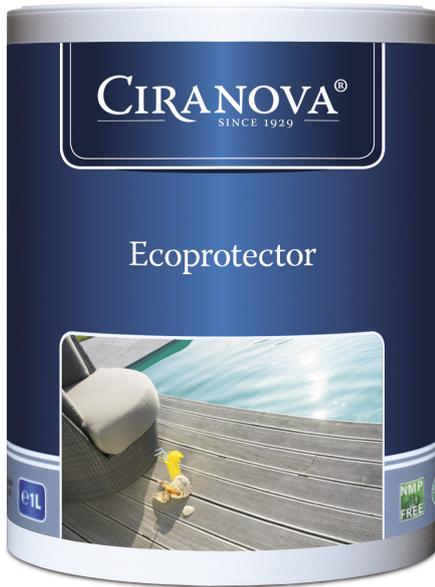

1L

2,5L

## PRODUCT DISCRIPTION

Ciranova Ecoprotector is used to protect outdoor wood such as resinous wood, exotic wood and European hardwoods. Ecoprotector doesn't form a film but penetrates into the wood. Ecoprotector is excellent to treat vertical and horizontal surfaces. 2 - 3 layers Ecoprotector provides a nurturing protection that not flakes and which is easy to maintain.

## TECHNICAL DATA

SHINE	NOT APPLICABLE
DENSITY	1,0 - 1,1 DEPENDING OF THE COLOR

## PREPARATION

The wood that must be treated must be clean and dry. All traces of previous coatings (Varnish, paint, stain) should be removed. Weathered wood can first be treated with Ciranova degreyer. After this preparation the surface should be lightly sanded so that the Ecoprotector can easily penetrate.

## USER INSTRUCTIONS

Stir Ciranova Ecoprotector before and during use. Ecoprotector should not be diluted. It's recommended to first test the color before applying the Ecoprotector on the whole surface. Apply the first coat with a roller, a large brush or a spray gun, in the direction of the wood fibers. Let the Ecoprotector penetrate for +/- 30 minutes. The second layer can be applied before the first coat is completely dry. After a few minutes it's recommended to use a dry brush to remove excess product to avoid film formation and dripmarks.



## DRYING TIMES

Between 2 layers: +/- 30 minutes  
Dust-dry: 3 à 4 hours  
chargeable after 12 hours



## APPLYING QUANTITY

10 - 14 m<sup>2</sup>/l depending of the kind of wood.

## AFTER TREATMENT

By the influence of weather and UV radiation, shades of wood become lighter. Ecoprotector can be reapplied after dusting the weathered areas. Apply only at the places where the color is lighter.

By late maintenance, first lightly sand the wood. After sanding treat with Ciranova Degreyer and apply Ecoprotector as described above.

Ciranova® products are made for the professional user. The instructions specified in the data sheet are formulated after necessary tests were performed and after years of experience. However, they are drawn to our best knowledge and ability. The user must test the application of the product in the for him applicable conditions. Guarantee can not be derived out the text of this technical description.

## PRODUCED BY DEBAL COATINGS NV

Industrieweg 29 – B 8800 Beveren-Roeselare  
tel +32 (0) 51 30 11 40  
fax +32 (0) 51 31 26 48  
ciranova@ciranova.be  
www.ciranova.be

**CIRANOVA**<sup>®</sup>  
SINCE 1929

## PRODUCT INFORMATION

Must be stored frost-proof.

storage life: 12 months in original sealed packaging.


## SPECIAL QUALITIES

Clean the tools immediately after use with water.

It is recommended to test the product before applying it on the entire surface.

The kind of wood, the sanding ... may affect the final color.

The color NATURAL slightly bleach the wood so this color is less suitable for dark wood!

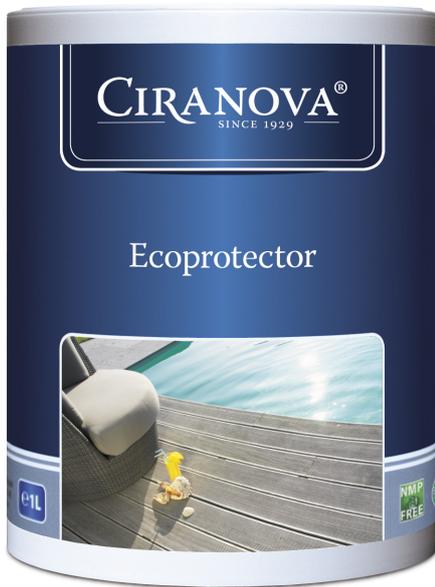

1L

2,5L

Ciranova® products are made for the professional user. The instructions specified in the data sheet are formulated after necessary tests were performed and after years of experience. However, they are drawn to our best knowledge and ability. The user must test the application of the product in the for him applicable conditions. Guarantee can not be derived out the text of this technical description.

## PRODUCED BY DEBAL COATINGS NV

Industrieweg 29 – B 8800 Beveren-Roeselare  
tel +32 (0) 51 30 11 40  
fax +32 (0) 51 31 26 48  
ciranova@ciranova.be  
www.ciranova.be